

## IMPROVED SEAL AND PRESSURE RELIEF FOR STEAM INJECTION HEATER

Serial No. 10/774,729

Attorney Docket No.: 177-00022

## Replacement Sheet

1 / 9

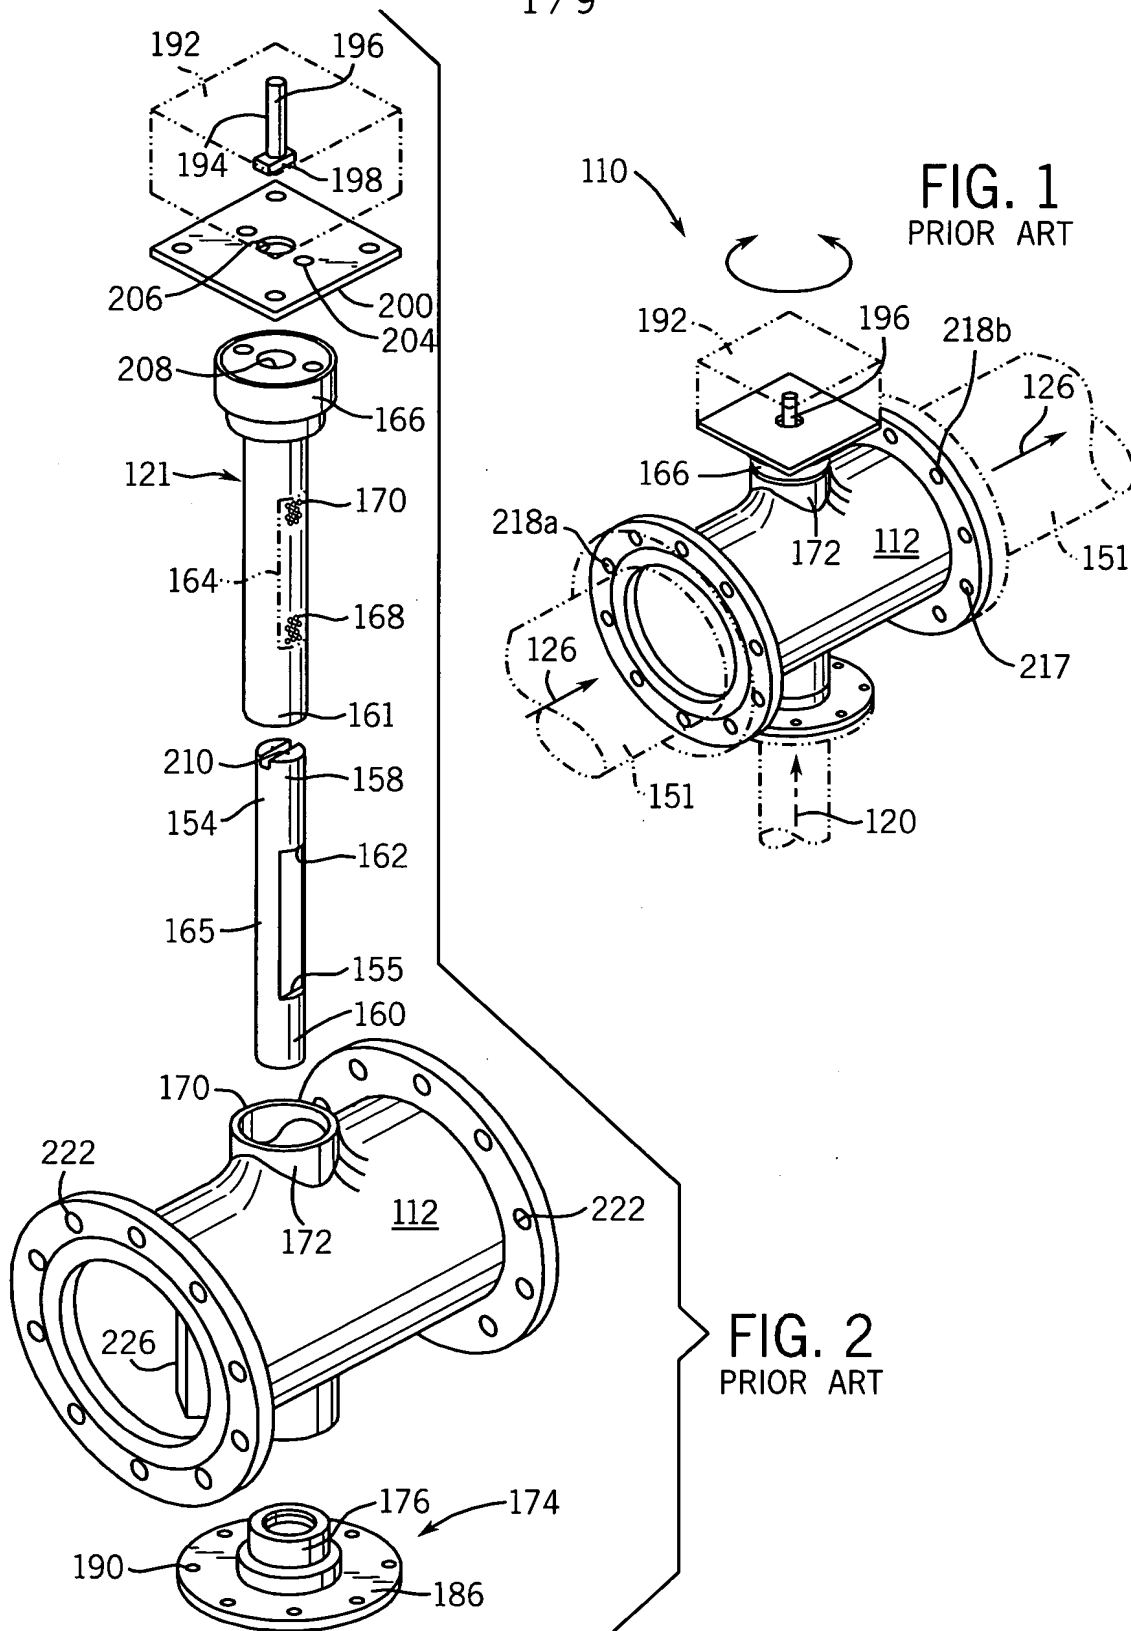


FIG. 1  
PRIOR ART

FIG. 2  
PRIOR ART

IMPROVED SEAL AND PRESSURE RELIEF FOR  
STEAM INJECTION HEATER

Serial No. 10/774,729

Attorney Docket No.: 177-00022

Replacement Sheet

2 / 9

FIG. 3  
PRIOR ART

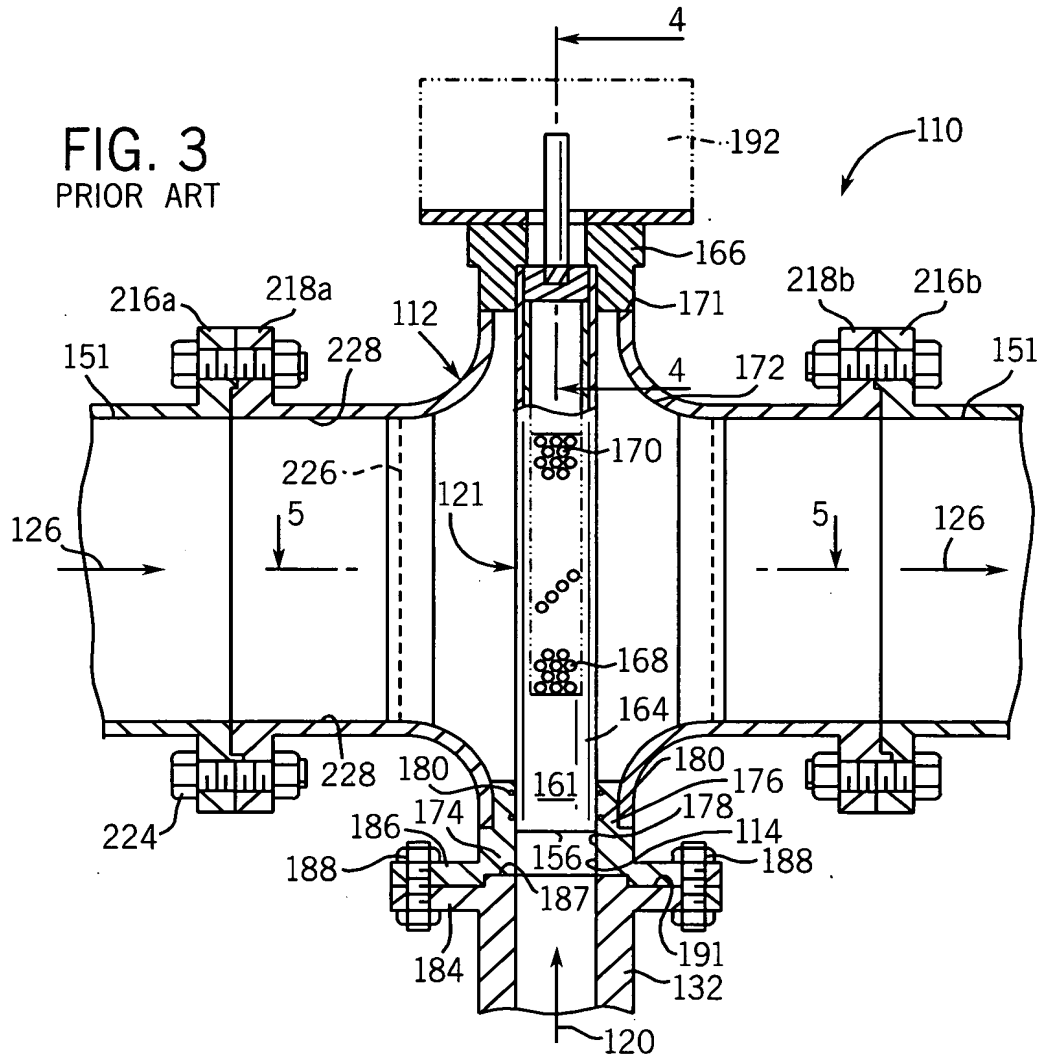


FIG. 4  
PRIOR ART

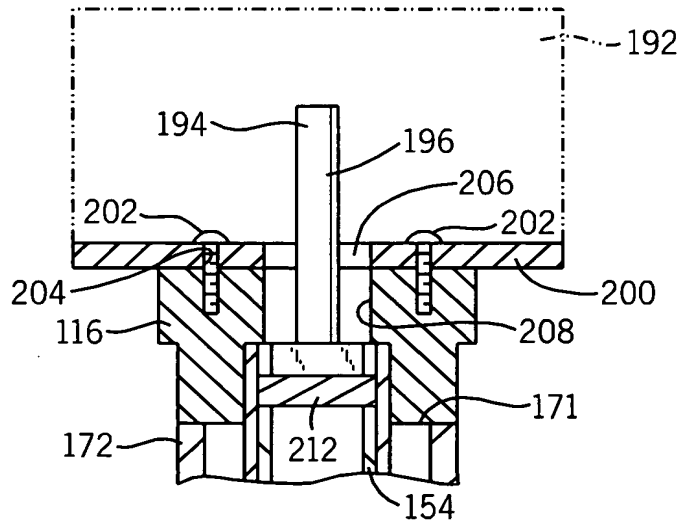


FIG. 5  
PRIOR ART

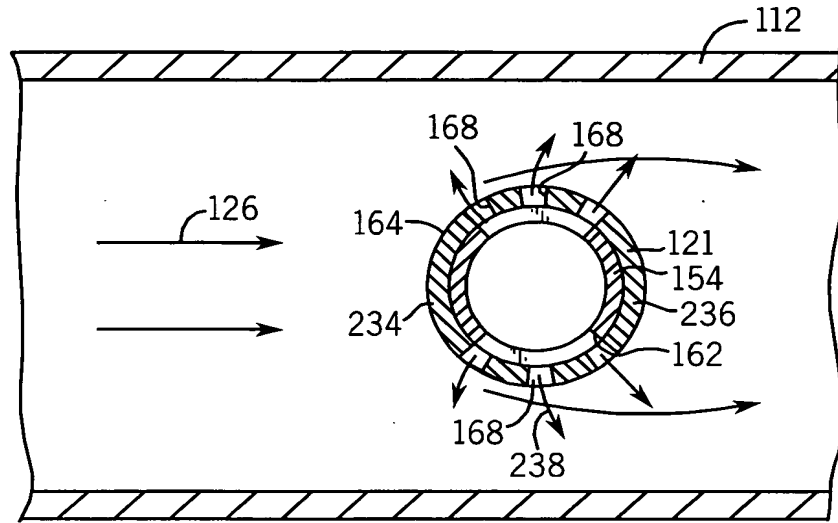


FIG. 6A  
PRIOR ART


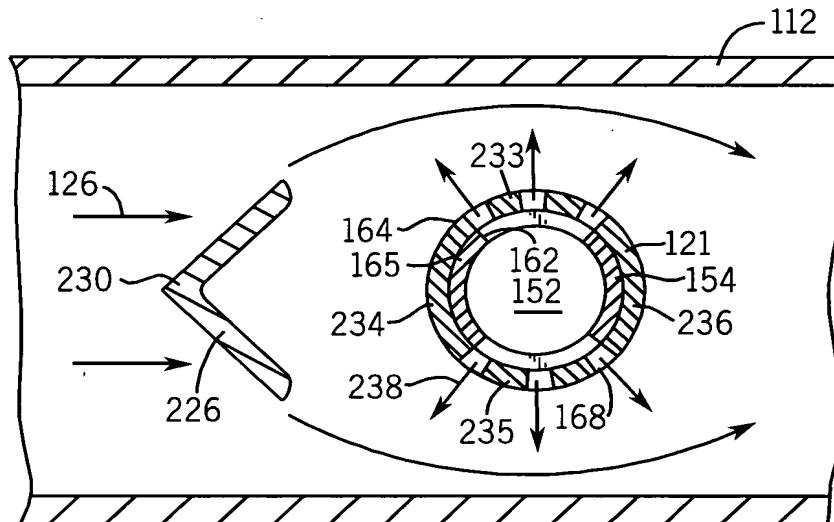


FIG. 6B  
PRIOR ART

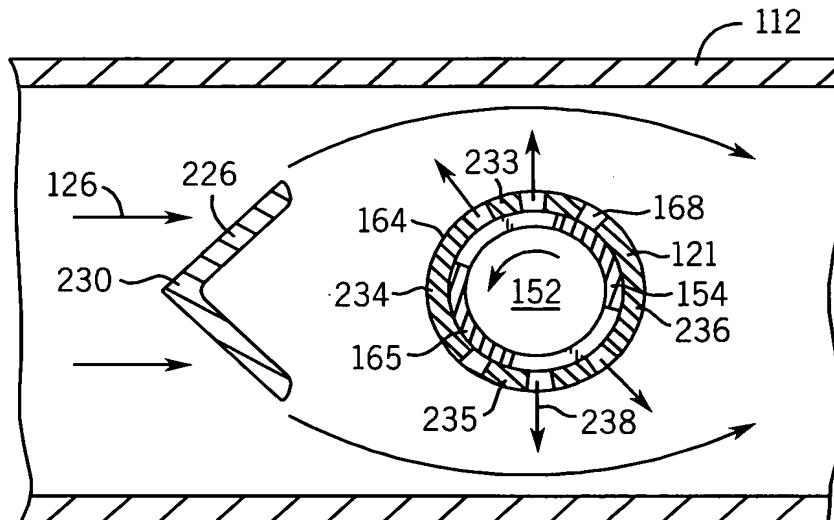


Serial No. 10/774,729  
Attorney Docket No.: 177-00022  
Replacement Sheet

Attorney Docket No.: 177-00022

## Replacement Sheet

This exploded perspective view shows the assembly of a mechanical device. At the top, a hook is attached to a cylindrical component. Below this is a rectangular block, followed by a bracket-like component with four screws. A small cylindrical pin is positioned below the bracket. The main body of the device consists of a large cylindrical component (321) with a textured lower section (336). A central shaft (332) passes through the center of the cylinder. Below the cylinder is a smaller cylindrical component (330) with a central opening (346). A spring (334) is located below the smaller cylinder. A flange (331) is at the bottom of the spring. To the right, a bracket (349) is shown with two screws. At the bottom, a large flange (362) is shown with a central opening (364) and a smaller opening (312). A small rectangular component (349) is shown to the left of the large flange.

FIG. 7

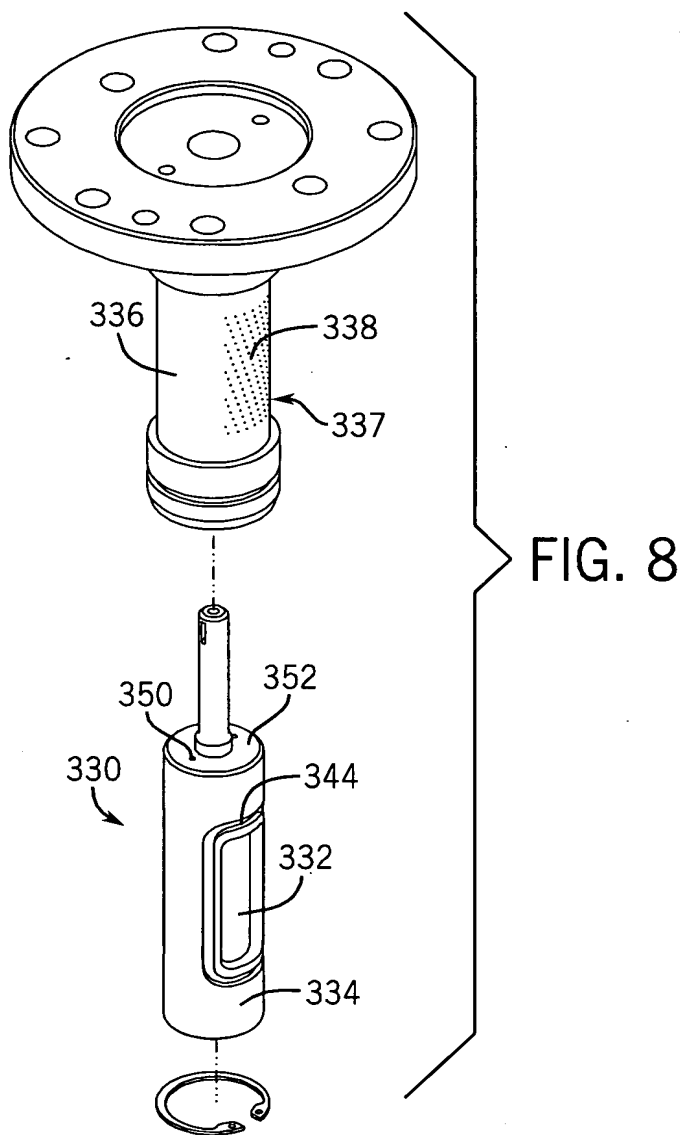

IMPROVED SEAL AND PRESSURE RELIEF FOR  
STEAM INJECTION HEATER


Serial No. 10/774,729

Attorney Docket No.: 177-00022

Replacement Sheet

6 / 9

FIG. 9

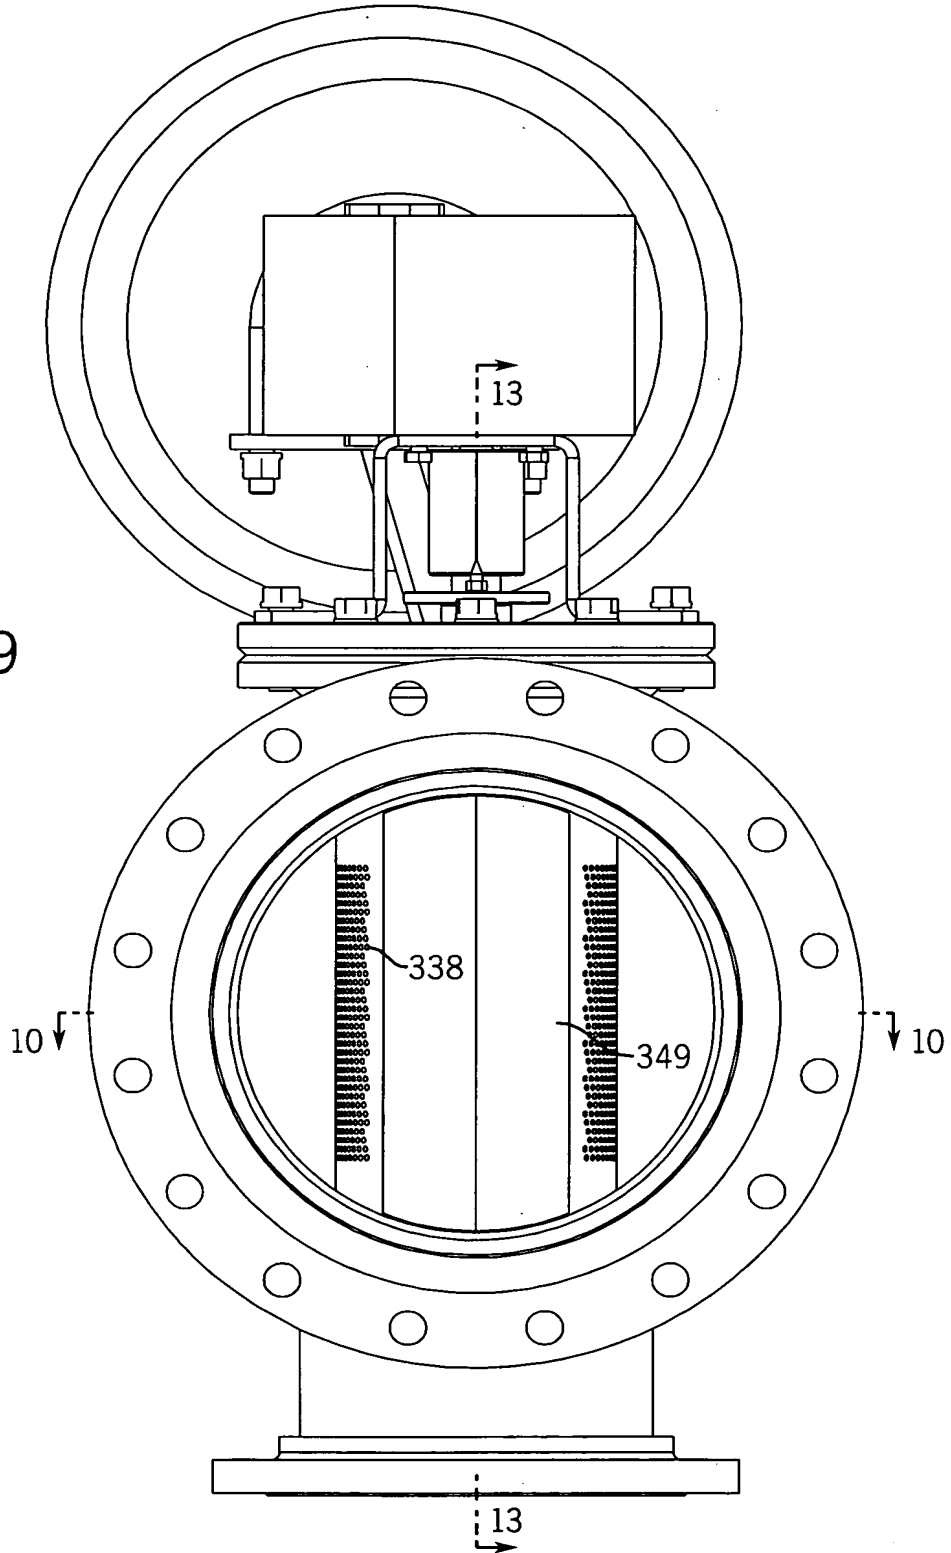

7 / 9

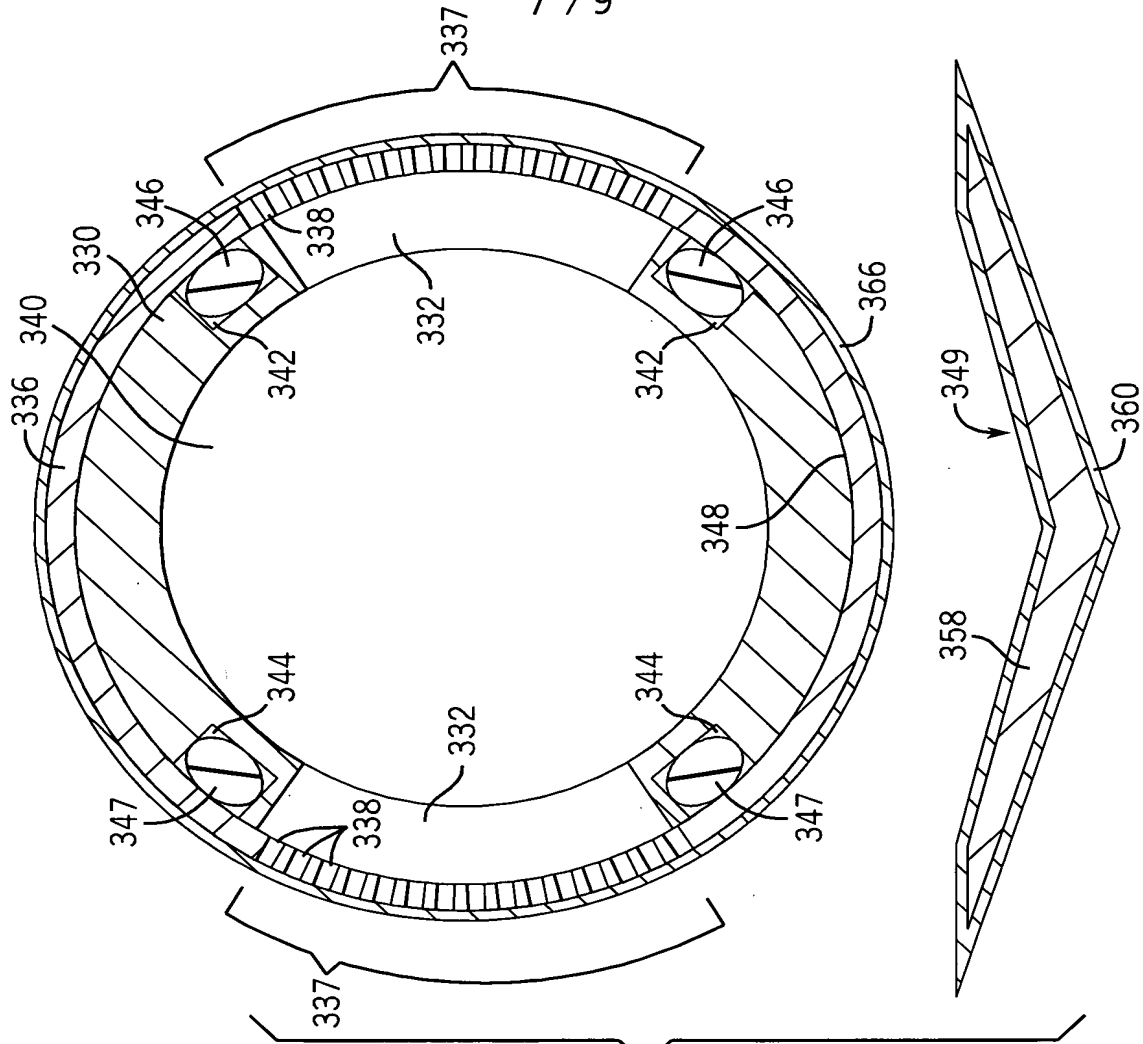


FIG. 11


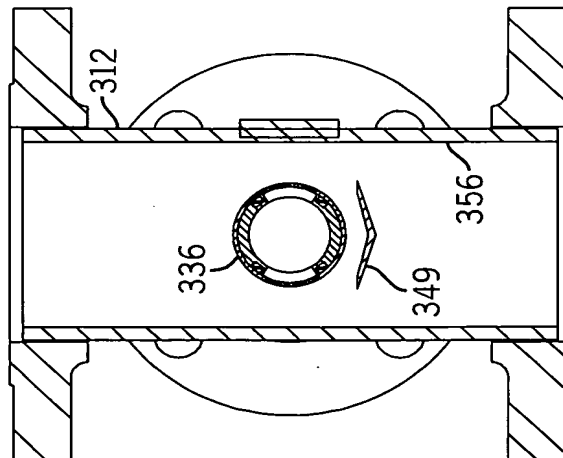


FIG. 10

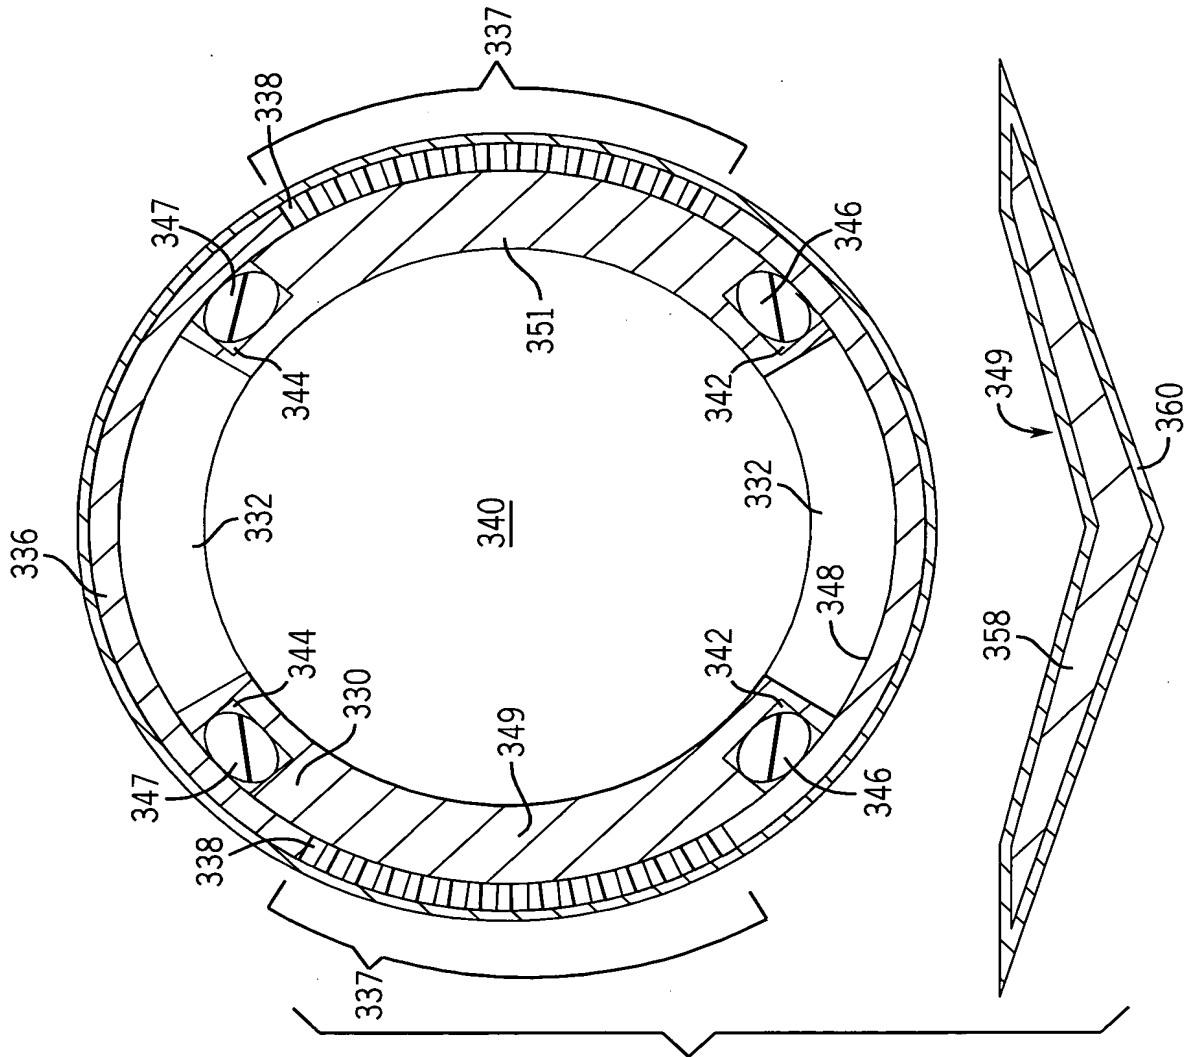

IMPROVED SEAL AND PRESSURE RELIEF FOR  
STEAM INJECTION HEATER

Serial No. 10/774,729

Attorney Docket No.: 177-00022

Replacement Sheet

9 / 9

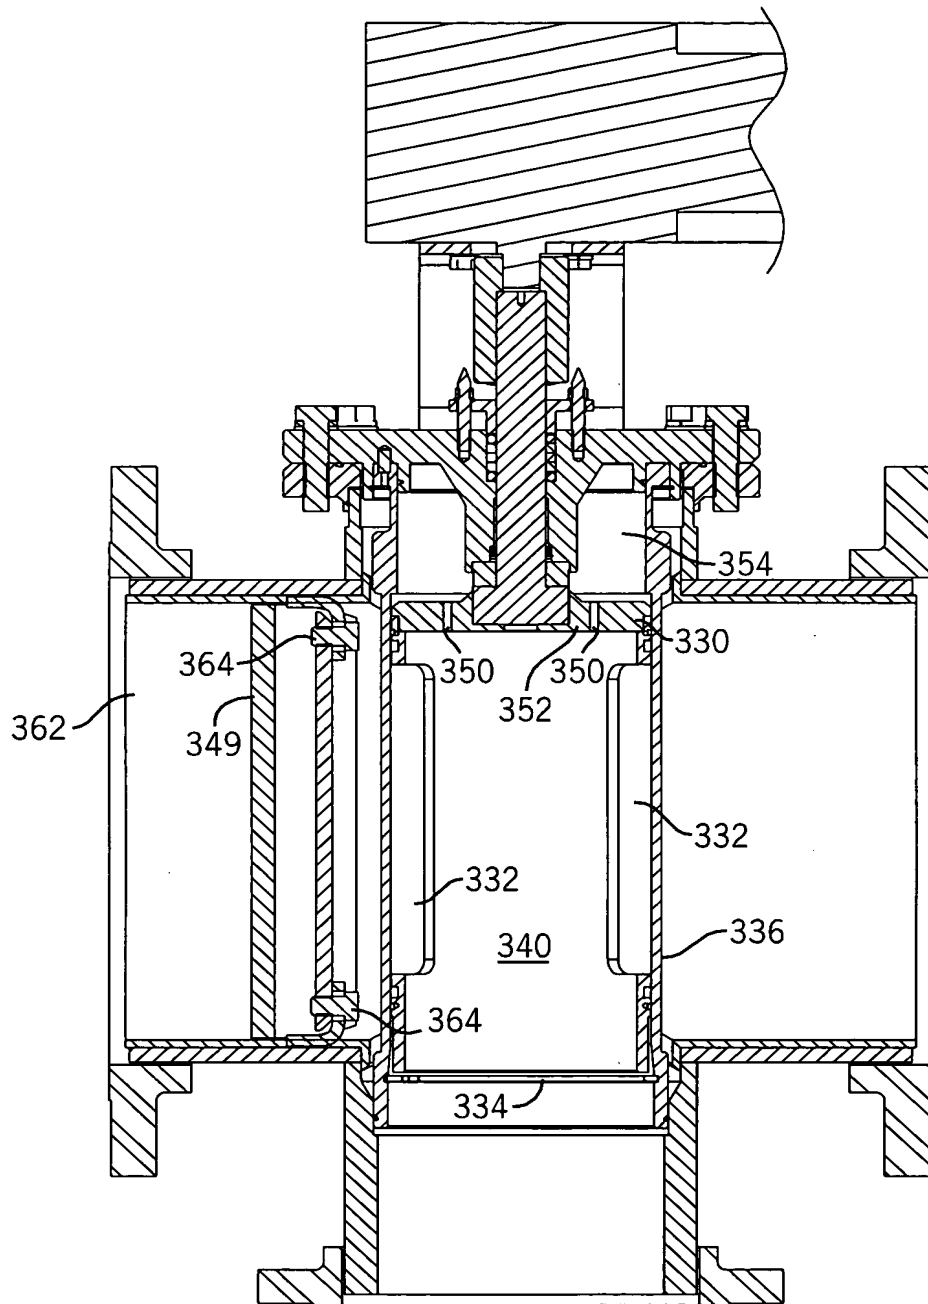


FIG. 13